




Acoustic Infills

High performance sound absorption for perforated metal decks

ROCKWOOL Acoustic Infills combine optimal density, random fibre orientation and excellent fit to provide a significant improvement in sound absorption when used within the troughs of perforated metal roof decks. The product is wrapped in a factory-applied acoustically-transparent white tissue facing for improved aesthetics.

For the best performance, we recommend using in combination with ROCKWOOL HardRock® Multi-Fix roofing boards.


- Optimum density with random fibre orientation provides exceptional acoustic absorption
- Pre-cut to suit specific profiles for quick and easy installation
- Enhanced aesthetics: faced on all sides with an acoustically transparent tissue covering
- Achieves Class C absorption under EN ISO 11654 (when tested in conjunction with ROCKWOOL HardRock Multi-Fix)
- Vapour control layer can be installed directly onto the roof decking
- Manufactured using non-combustible ROCKWOOL insulation

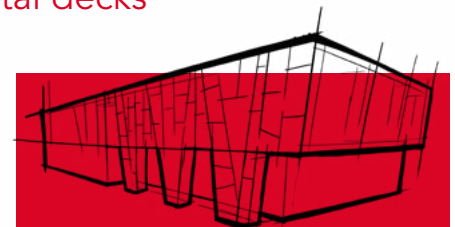

An effective solution to control the indoor acoustic environment.

ROCKWOOL Acoustic Infills are engineered to fit within the troughs of a perforated metal deck, where they act to absorb incident sound that would otherwise be reflected back into the space below. This lowers the reverberation time within the room, which lowers the noise level and can improve speech intelligibility.

Acoustic Infills

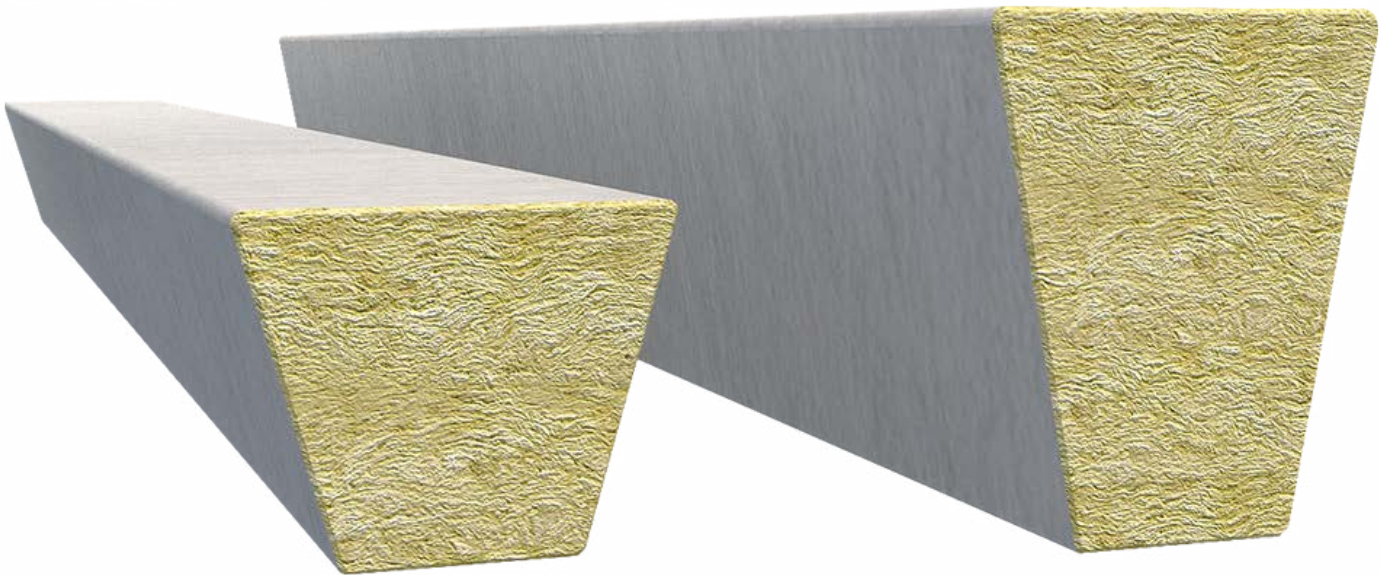

APPLICATIONS

ROCKWOOL Acoustic Infills are used across all sectors, including commercial, industrial, leisure, health and educational. They are used to control noise in convention and sports halls, swimming pools, manufacturing plants, meeting areas, food courts, indoor concourses; to name but a few applications.

PERFORMANCE

The ability of the underside of the following roof build-up to absorb sound was tested to BS EN ISO 354:

- ROCKWOOL Acoustic Infills within perforated TATA D60 perforated steel deck (13% open area)
- Vapour control layer
- 210mm ROCKWOOL HardRock Multi-Fix
- Mechanically fastened single ply membrane

Results

Frequency (Hz)	125	250	500	1000	2000	4000
Practical absorption coefficient	0.55	0.95	1.00	0.90	0.60	0.40

Weighted absorption coefficient $\alpha_w = 0.60$

Acoustic Infills

PRODUCT INFORMATION

To suit TATA deck	Length (mm)	Major (mm)	Minor (mm)	Thickness (mm)
D46	1200	116	63	42
D60	1200	106	60	55
D100	1200	120	59	95
D135	1200	161	39	130
D159	1200	138	34	150

Acoustic Infills to suit other deck types may be available upon request, subject to a minimum order quantity. For more information please contact your local ROCKWOOL representative.

Density

The standard density of ROCKWOOL Acoustic Infills is 60kg/m³.

Handling

When handling Acoustic Infills they should be properly supported along their length.

Weather Protection

Acoustic Infills should be stored under cover. Acoustic Infills that have become wet should be allowed to fully dry out naturally before use, at which point they should regain their original properties. For more information please contact Technical Solutions on 01656 868 490.

STANDARDS AND APPROVALS

Certificate
EN ISO 11654: Class C absorber
ASTM C 423-01: NRC 0.90

INSTALLATION

Insert ROCKWOOL Acoustic Infills directly into the troughs of the metal deck, ensuring that all joints are tightly butted. Individual Acoustic Infills can be cut down to shorter lengths using a sharp knife if required.

Specify SPRA

The Single Ply Roofing Association (SPRA) represents membrane manufacturers, associated component manufacturers and specialist subcontractors, and aims to ensure the delivery of best value single ply roofing systems, through a quality assured partnership. By specifying products and specialist installation by SPRA Manufacturer, Associate and Contractor members you can be assured that all parties meet strict quality criteria.

Compliance with these criteria and with the Code of Conduct is assessed at application, by annual audit and by random spot checks. For further information, and to obtain copies of the SPRA Design Guide and other documents, go to www.spra.co.uk or call 0115 914 4445.

Acoustic Infills

BUILDING SAFETY AND PRODUCT USE

LEGAL NOTICES

General safety requirements – Building Safety Act 2022

ROCKWOOL Limited is committed to supporting specifiers, resellers and users of ROCKWOOL products for the full life cycle of the product to comply with the obligations and responsibilities set out in the Building Safety Act 2022. With regard to the general safety requirements of the Act, ROCKWOOL Limited cannot control or foresee every situation where its products might be used. We therefore strongly advise that specifiers, resellers and users contact us where use of ROCKWOOL products is contemplated in applications different from those explicitly described in the latest, relevant ROCKWOOL product datasheets; especially in applications that can be reasonably foreseen as critical to safety.

ROCKWOOL Limited reserves the right to amend the specification of its products without notice. Changes to the ROCKWOOL manufacturing process, or to pertinent regulations, may be reflected in changes to tested and certified product performance. Whilst ROCKWOOL Limited endeavours to keep its publications up to date, readers will appreciate that between publications there may be pertinent changes in the law or other developments affecting the accuracy of the information contained in our publications.

ROCKWOOL Limited does not accept responsibility for the consequences of using (including testing or certifying) its products in applications different from those explicitly described in the relevant ROCKWOOL product datasheets. Expert advice should be sought, and ROCKWOOL Limited should be contacted, where such different use is contemplated, or where the extent of any use described by ROCKWOOL Limited is in doubt.

The ROCKWOOL Trademark

ROCKWOOL® - our trademark

The ROCKWOOL trademark was initially registered in Denmark as a logo mark back in 1936. In 1937, it was accompanied with a word mark registration; a registration which is now extended to more than 60 countries around the world.

The ROCKWOOL trademark is one of the most important assets of the ROCKWOOL Group, and is therefore well-protected and defended by ROCKWOOL throughout the world.

If you require permission to use the ROCKWOOL logo for your business, advertising or promotion, you must apply for a Trade Mark Usage Agreement.

To apply, write to:
marketcom@rockwool.com

Trademarks

Registered trademarks of the ROCKWOOL Group include but are not limited to:

ROCKWOOL®, RockClose®, RainScreen Duo Slab®, HardRock®, RockFloor®, Flexi®, RockFall®, FirePro®, DuctRock®, BeamClad®, NyRock®

© ROCKWOOL 2023.
All rights reserved.

Photography and illustrations

The product illustrations are the property of ROCKWOOL Limited and have been created for indicative purposes only.

Unless indicated below, the photography and illustrations used in this guide are the property of ROCKWOOL Limited. We reserve all rights to the usage of these images.

If you require permission to use ROCKWOOL images, you must apply for a Usage Agreement.

To apply, write to:
marketcom@rockwool.com

Acoustic Infills

ROCKWOOL stone wool - safe to install and live alongside

There are no hazardous classifications associated with stone wool insulation manufactured by ROCKWOOL-UK according to EU REACH and UK REACH regulations on health and the environment.

ROCKWOOL safe use instruction sheets and material safety data sheets (where applicable) can be downloaded [here](#).




Sustainability

ROCKWOOL products are used to enrich modern living, creating safer, healthier and more climate-resilient communities.

We transform abundant, natural volcanic rock into stone wool insulation products that are used to reduce energy demand, lower fuel bills and help address society's climate change challenges.

ROCKWOOL stone wool insulation is recyclable and can be transformed into new ROCKWOOL products. Please contact us for details of how we can work together to recycle waste ROCKWOOL stone wool material that may be generated during on-site installation.

Our annual sustainability reports, which set out progress against our sustainability goals, and further details of the positive impacts of using our products can be found on our website.



Environment

ROCKWOOL takes a fact-based, auditable approach to documenting our progress in maximising our products' positive impact and minimising the effect our operations have on the environment, backed by third-party references and methodologies. Further details can be found online in our annual sustainability report.

Our high-tech production process uses filters, pre-heaters, after-burners and other cleaning and collection systems that help to reduce the effects of our manufacturing operations on the environment.

ROCKWOOL stone wool insulation does not contain (and has never contained) gases that have ozone depletion potential (ODP) or global warming potential (GWP).

