


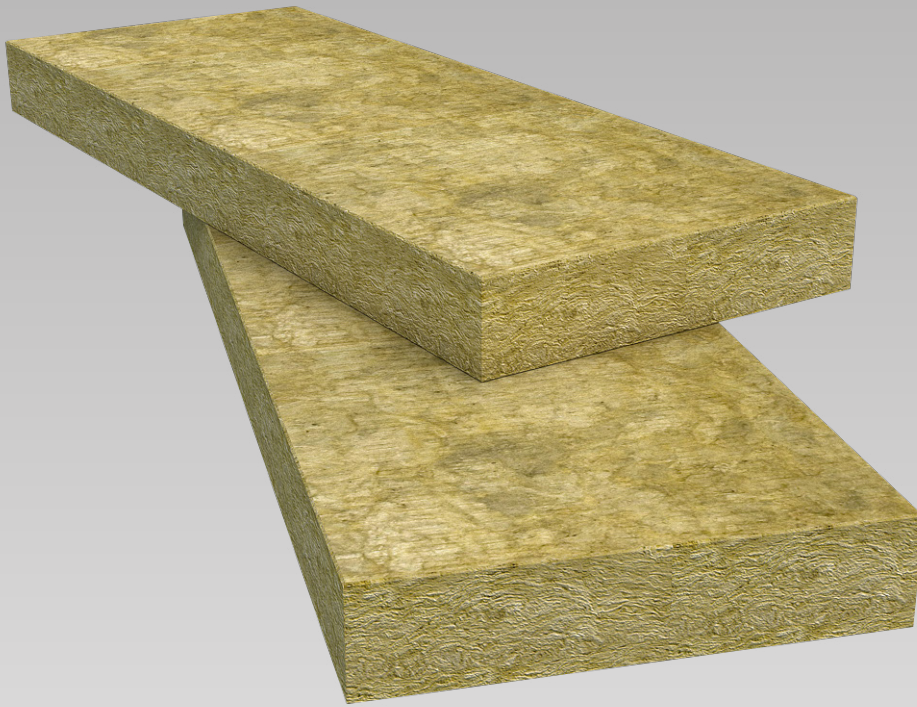


Full Fill Cavity Batt

Insulation for masonry cavity walls.

ROCKWOOL Full Fill Cavity Batt is a semi-rigid insulation solution for masonry cavity wall constructions, suitable for use in new builds or extensions.

- Thermal conductivity of 0.037 W/mK.
- Full Fill Cavity Batt is able to resist temperatures of over 1,000°C achieving the highest Euroclass A1 non-combustibility classification as defined in EN 13501-1.
- The slab features an additive to support the product's water repellent properties.
- The slabs come in a 455mm width to suit standard vertical wall tie spacings allowing a closely knitted joint with adjacent slabs.
- BBA certified for full fill applications in all exposure zones other than in very severe exposure zones with fair-faced masonry. BBA Certificate 94/3079.

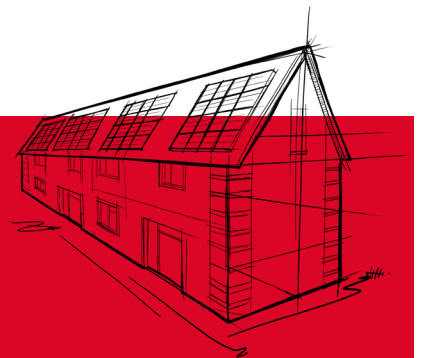

ROCKWOOL stone wool insulation resists moisture in humid climates, helping to protect the health of buildings and the people within them.

Full Fill Cavity Batt



APPLICATIONS

Full Fill Cavity Batt can be for thermal insulation of external masonry cavity walls, and for the thermal insulation and acoustic protection of masonry party walls between dwellings.

Full Fill Cavity Batt has been examined by the British Board of Agrément (BBA) and granted Certificate 94/3079 for use in all exposure zones for domestic and non-domestic buildings that are up to 25m in height.

The NHBC accepts the use of Full Fill Cavity Batt, other than in very severe exposure locations with fair-faced masonry, provided it is installed, used and maintained in accordance with the BBA Certificate, in relation to NHBC Standards, Chapter 6.1, External masonry walls.

Building standards have also recognised that where party cavity-walls between connected buildings are untreated, considerable heat can escape through them. Using Full Fill Cavity Batt to fully fill the party wall will reduce the U-value to 0.00 W/m²K.*

This product is intended for use on the external side of the vapour barrier.

PERFORMANCE

Thermal performance

Full Fill Cavity Batt achieves a thermal conductivity lambda (λ) value of 0.037 W/mK in accordance with BS EN 13162:2012 + A1:2015.

Fire performance

Full Fill Cavity Batt is non-combustible achieving a reaction to fire classification of A1, as defined in EN 13501-1. Full Fill Cavity Batt is suitable for use in buildings of every purpose group (as classified within table 0.1 of Approved Document B), also acting as a cavity barrier when tightly fitted between masonry leaves where an insulated wall connects with an uninsulated wall cavity.

Acoustic performance

The non-directional fibre orientation and density of ROCKWOOL stone wool helps absorb sound waves and dampen vibrations, reducing the transmission of external noise when used in external wall applications.

* Zero U-value judgements as recognised in Building Regulations' Approved Document L.


Full Fill Cavity Batt

TYPICAL U-VALUES

Application performance - Full Fill application 1:

102mm facing brick outer skin, ROCKWOOL Full Fill Cavity Batt, 100mm internal concrete block (various densities).
Internal finishes: light plaster or plasterboard on dab.

Inner block	Dense 1900-2250 kg/m ³		Medium dense 1400-1450kg/m ³		Aircrete Hi Strength 750kg/m ³		Aircrete Standard 600kg/m ³	
W/mK	1.130 W/mK		0.470 W/mK		0.190 W/mK		0.150 W/mK	
Internal finish	Light plaster	Plasterboard on dab	Light plaster	Plasterboard on dab	Light plaster	Plasterboard on dab	Light plaster	Plasterboard on dab
Cavity (mm)	U-value W/m ² K	U-value W/m ² K	U-value W/m ² K	U-value W/m ² K	U-value W/m ² K	U-value W/m ² K	U-value W/m ² K	U-value W/m ² K
100	0.32	0.30	0.31	0.29	0.28	0.27	0.28	0.27
130	0.25	0.24	0.25	0.24	0.23	0.22	0.23	0.22
150	0.22	0.22	0.22	0.21	0.21	0.20	0.20	0.20
175	0.19	0.19	0.19	0.18	0.18	0.17	0.18	0.17

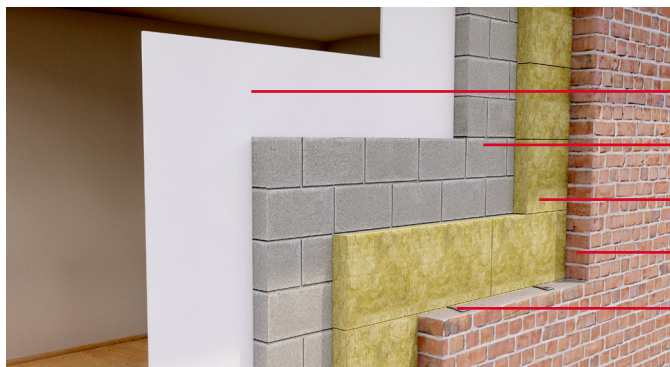

Plasterboard on dabs OR light plaster

Concrete block inner leaf

Full Fill Cavity Batt

Facing brick outer skin

Cavity wall tie

Application performance - Full Fill application 2:

Render on 100mm medium dense block outer, ROCKWOOL Full Fill Cavity Batt, 100mm internal concrete block (medium dense or Standard Aircrete) Internal finishes: light plaster or plasterboard on dab.

Inner block	Medium dense 1400-1450kg/m ³		Aircrete Hi Strength 750kg/m ³	
W/mK	0.470 W/mK		0.190 W/mK	
Internal finish	Light plaster	Plasterboard on dab	Light plaster	Plasterboard on dab
Cavity (mm)	U-value W/m ² K	U-value W/m ² K	U-value W/m ² K	U-value W/m ² K
100	0.30	0.29	0.26	0.26
130	0.24	0.23	0.22	0.22
150	0.21	0.21	0.19	0.19
175	0.19	0.18	0.17	0.17

The U-values shown in the constructions above are based on the following:

- Internal face of walls is lined with either plasterboard on dab or 13mm lightweight plaster.
- Block sizes assumed to be 440mm x 215mm, mortar joints assumed to be 10mm wide.
- Wall ties are stainless steel with a cross-sectional area of 12.5mm² for cavities up to 170mm wide.
- For cavities widths greater than 170mm, the cross-sectional area of tie is assumed to be 25mm.

Full Fill Cavity Batt

Party wall “thermal bypass effect” – achieving a zero heat loss

Approved Documents L1A & L2A of England and Wales and Section 6 of Scotland’s Building standards have recognised that where party cavity-walls between connected buildings are untreated, considerable heat can escape through them.

A key feature of the SAP calculation is that party wall cavities should have a zero heat loss (U-value 0.0 W/m²K). If these cavities are left unfilled and unsealed, a U-value of 0.5W/m²K will automatically be applied, making it extremely difficult to meet the TER compliance.

In calculating the DER for a Dwelling, the party wall U-value to be assumed for the type of construction adopted is set out in the Table 3 below.

Party wall construction	U-value W/m ² K
Unfilled cavity with no effective edge sealing	0.50
Unfilled cavity with effective edge sealing only	0.20
Fully filled cavity and effective edge sealing	0.0

Robust detail approval for use as acoustic insulation in masonry party wall constructions

Robust Details Limited was formed in December 2003 in response to the housebuilding industry’s request for an alternative to pre-completion sound testing, as a means of satisfying the sound insulation requirements of the Building Regulations. Below are the constructions to achieve the referenced robust detail for masonry construction.

Robust detail wall reference – masonry	Party wall construction	Party wall cavity size (mm)
E-WM- 1	Dense blocks 1850-2300kg wet plaster	75-100
E-WM- 2	Light agg. blocks 1350-1600kg wet plaster	75-100
E-WM- 3	Dense blocks 1850-2300kg render faces/plasterboard on dab	75-100
E-WM- 4	Light agg. blocks 1350-1600kg render/plasterboard on dab finish	75-100
E-WM- 5	Besblock “Star Performer” dense aggregate cellular blocks/render/plasterboard on dab	75-100
E-WM-11	Lightweight 1350-1600kg agg. or nominated hollow or cellular blocks render/plasterboard on dab	75-100
E-WM- 16	Dense aggregate blocks 1850-2300kg render/plasterboard on dab	100
E-WM- 18	Dense blocks 1850-2300kg wet plaster	100
E-WM- 19	Monarfloor Bridgestop System 100mm Dense or lightweight blocks or nominated hollow or cellular blocks/render/plasterboard on dab	100

Full Fill Cavity Batt

PRODUCT INFORMATION

Length (mm)	Width (mm)	Thickness* (mm)
1200	455	Available in a range of sizes between 50mm and 250mm.

*Thickness options may be subject to a minimum production volume. Speak to the specification team for guidance.

ADDITIONAL INFORMATION

Durability

Tests of our stone wool recovered from old buildings have shown that it retains its performance characteristics – thermal, mechanical, fire resistance – for at least 50 years, and probably longer. A test of a 65-year-old stone wool sample found in 2023 during a renovation of Copenhagen airport showed that these characteristics had not diminished after 65 years.*

**Testing done at Danish Technical Institute (DTI) in 2023, "Testing ROCKWOOL insulation from CPH airport hangar 4"*

Water resistance and moisture

ROCKWOOL stone wool insulation is water repellent and non-hygroscopic, meaning it will not absorb water from the surrounding environment. It retains its thermal performance even in humid conditions, helping to support the durability of the building fabric.

Condensation

ROCKWOOL stone wool insulation is vapour permeable, reducing the risk of condensation, which can lead to rot, mould and humidity damage.

STANDARDS AND APPROVALS

Certificate
ROCKWOOL Full Fill Cavity Batt satisfies the requirements of BS EN 13162 "Thermal insulation products for buildings. Factory made mineral wool (MW) products".
Manufactured under ISO 14001 Environmental Management Systems, and ISO 9001 Quality Management Systems.
BBA (British Board of Agreement) Certified for use in buildings up to 12m high and for use in multi-storey applications up to 25m in height. Certificate no. 94/3079.



INSTALLATION

The product must be installed in accordance with the current ROCKWOOL guidelines. For further information please visit rockwool.com/uk or contact our Technical Solutions Team on 01656 868490.

SPECIFICATION CLAUSES

The following NBS clauses include Full Fill Cavity Batt:

F30:10, F30:150

Full Fill Cavity Batt

BUILDING SAFETY AND PRODUCT USE

LEGAL NOTICES

General safety requirements – Building Safety Act 2022

ROCKWOOL Limited is committed to supporting specifiers, resellers and users of ROCKWOOL products for the full life cycle of the product to comply with the obligations and responsibilities set out in the Building Safety Act 2022. With regard to the general safety requirements of the Act, ROCKWOOL Limited cannot control or foresee every situation where its products might be used. We therefore strongly advise that specifiers, resellers and users contact us where use of ROCKWOOL products is contemplated in applications different from those explicitly described in the latest, relevant ROCKWOOL product datasheets; especially in applications that can be reasonably foreseen as critical to safety.

ROCKWOOL Limited reserves the right to amend the specification of its products without notice. Changes to the ROCKWOOL manufacturing process, or to pertinent regulations, may be reflected in changes to tested and certified product performance. Whilst ROCKWOOL Limited endeavours to keep its publications up to date, readers will appreciate that between publications there may be pertinent changes in the law or other developments affecting the accuracy of the information contained in our publications.

ROCKWOOL Limited does not accept responsibility for the consequences of using (including testing or certifying) its products in applications different from those explicitly described in the relevant ROCKWOOL product datasheets. Expert advice should be sought, and ROCKWOOL Limited should be contacted, where such different use is contemplated, or where the extent of any use described by ROCKWOOL Limited is in doubt.

The ROCKWOOL Trademark

ROCKWOOL® - our trademark

The ROCKWOOL trademark was initially registered in Denmark as a logo mark back in 1936. In 1937, it was accompanied with a word mark registration; a registration which is now extended to more than 60 countries around the world.

The ROCKWOOL trademark is one of the most important assets of the ROCKWOOL Group, and is therefore well-protected and defended by ROCKWOOL throughout the world.

If you require permission to use the ROCKWOOL logo for your business, advertising or promotion, you must apply for a Trade Mark Usage Agreement.

To apply, write to:
marketcom@rockwool.com

Trademarks

Registered trademarks of the ROCKWOOL Group include but are not limited to:

ROCKWOOL®, RockClose®, RainScreen Duo Slab®, HardRock®, RockFloor® Flexi®, RockFall®, FirePro®, DuctRock®, BeamClad®, NyRock®

© ROCKWOOL 2026.
All rights reserved.

Health and safety

A Material Safety Data Sheet is available and can be downloaded from www.rockwool.com/uk to assist in the preparation of risk assessments, as required by the Control of Substances Hazardous to Health Regulations (COSHH).

Photography and illustrations

The product illustrations are the property of ROCKWOOL Limited and have been created for indicative purposes only.

Unless indicated below, the photography and illustrations used in this guide are the property of ROCKWOOL Limited. We reserve all rights to the usage of these images.

If you require permission to use ROCKWOOL images, you must apply for a Usage Agreement.

To apply, write to:
marketcom@rockwool.com

Full Fill Cavity Batt

Company:	ROCKWOOL Limited
Version:	Version 3.03 August 2026 (to check this is the latest version, please refer to rockwool.com/uk)
Revised on:	04.08.2026
Product name:	Full Fill Cavity Batt
Replaces version:	Version 3.02 October 2025
Changes made:	• Updated applications information
Additional information:	N/A

Please ensure you are using the latest version of this document by verifying it on our official website. Do not rely on printed or previously downloaded copies, as these may be out of date.

Please contact the ROCKWOOL Technical Support Team if you would like to access archived versions of this document.

Full Fill Cavity Batt

ROCKWOOL stone wool – safe to install and live alongside

There are no hazardous classifications associated with stone wool insulation manufactured by ROCKWOOL UK according to EU REACH and UK REACH regulations on health and the environment.

ROCKWOOL safe use instruction sheets and material safety data sheets (where applicable) can be downloaded [here](#).




Sustainability

ROCKWOOL products are used to help enrich modern living, supporting more resilient and comfortable buildings.

We transform abundant, natural volcanic rock into stone wool insulation products that help our customers tackle energy consumption, noise pollution, fire resilience, and climate change challenges such as water scarcity and flooding.

Since our stone wool is endlessly recyclable with no loss in its performance properties, we can take back clean, uncontaminated new off-cuts and unused ROCKWOOL stone wool insulation from construction sites in the UK. Our service, Rockcycle®, takes back our stone wool and recycles it back into production where it is used to make new ROCKWOOL products.

Our annual sustainability reports, which set out progress against our sustainability goals, and further details of the positive impacts of using our products can be found on our website.



Environment

ROCKWOOL takes a fact-based, auditable approach to documenting our progress in maximising our products' positive impact and minimising the effect our operations have on the environment, backed by third-party references and methodologies. Further details can be found online in our annual sustainability report.

Our high-tech production process uses filters, pre-heaters, after-burners and other cleaning and collection systems that help to reduce the effects of our manufacturing operations on the environment.

ROCKWOOL stone wool insulation does not contain (and has never contained) gases that have ozone depletion potential (ODP) or global warming potential (GWP).

